

Two Position Selector Switches, Non-Illuminated (Complete Kits) ①


Switching Positions	Contact Block(s) ②③	Plastic operator with plastic bezel	Metal operator with metal bezel
		Catalog Number	Catalog Number
 M2 0 → 1	Oper. Only	D7P-♣M22	D7M-♣M22
	1	D7P-♣M22P▼	D7M-♣M22P▼
	2	D7P-♣M22P▼	D7M-♣M22P▼
 L2 1 → 0	Oper. Only	D7P-♣L22	D7M-♣L22
	1	D7P-♣L22P▼	D7M-♣L22P▼
	2	D7P-♣L22P▼	D7M-♣L22P▼
 R2 0 → 1	Oper. Only	D7P-♣R22	D7M-♣R22
	1	D7P-♣R22P▼	D7M-♣R22P▼
	2	D7P-♣R22P▼	D7M-♣R22P▼

Complete Kit Ordering Instructions ④

D7P	–	♣	M2	2	P	▼
Oper. Construction		Operator Type	Oper. Function	Knob Color	Mounting Latch	Contacts ②③
D7P - Plastic operator with plastic bezel (Type 4/4X/13, IP66)		S - Standard knob H - Long knob ⑤	M2 - Maintained, 60° switching L2 - angle Spring return R2 - from left, 60° Spring return from right, 60°	2 - Black knob, white insert	P - Plastic latch (D7P and D7M offered with plastic latch as standard) M - Metal latch	X10 - 1NO X01 - 1NC X20 - 2NO X02 - 2NC X11 - 1NO/1NC
D7M - Metal operator with metal bezel (Type 4/13, IP66)						


↻ Positive Opening per EN60947-5-1 (applies to all NC contact block styles)

Contact Type	Mounting Position on Latch		
NO	All slots	O	X
NC	All slots	X	O



- ① Legend plates sold separately. See page H73 for information.
- ② Up to 6 contact blocks (3 across / 2 high) can be attached.
- ③ See page H74 for complete kit ordering information on other special contact blocks: Early make, late break, low voltage contact blocks.
- ④ Contact actuation is reversed for "L2" type switch.
- ⑤ 30mm hole spacing will not work if long knob lever is used. See page H86 for recommended operator panel spacing.

Two Position Selector Switches, Non-Illuminated (Components) ❶

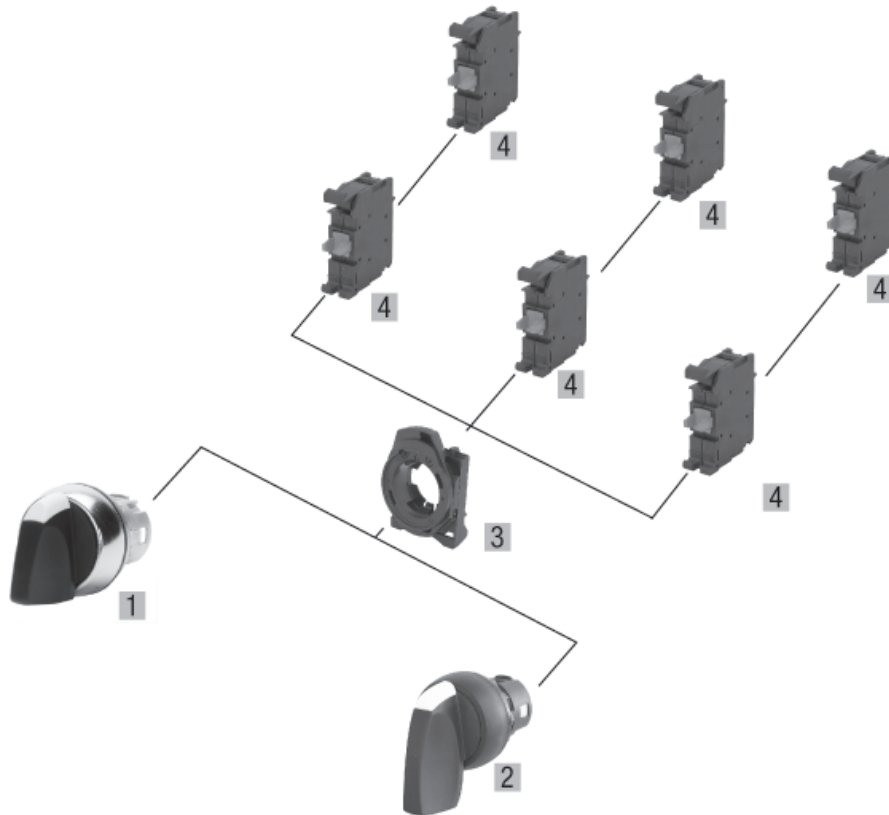

Component	Catalog Number	Pkg. Qty.
01 Standard knob, plastic operator, front bezel ❷		
Maintained 60° Black	D7P-SM22	1
Spring return from left, 60° Black	D7P-SL22	
Spring return from right, 60° Black	D7P-SR22	
Standard knob, shiny metal operator, front bezel ❷		
Maintained 60° Black	D7M-SM22	1
Spring return from left, 60° Black	D7M-SL22	
Spring return from right, 60° Black	D7M-SR22	
02 Long knob, plastic operator, front bezel		
Maintained 60° Black	D7P-HM22	1
Spring return from left, 60° Black	D7P-HL22	
Spring return from right, 60° Black	D7P-HR22	
Long knob, shiny metal operator, front bezel		
Maintained 60° Black	D7M-HM22	1
Spring return from left, 60° Black	D7M-HL22	
Spring return from right, 60° Black	D7M-HR22	

Component	Catalog Number	Pkg. Qty.
03 Tool-less Mounting Latch (for snap-on contact blocks and power modules)		
Plastic Latch	D7-ALP	10
Metal Latch	D7-ALM	
04 Contact blocks ❸		
NO	D7-X10	10
NC	D7-X01	
NO, early make	D7-X10E	
NC, late break	D7-X01L	
NO, low voltage	D7-X10V	10
NC, low voltage	D7-X01V	

❶ Legend plates sold separately. See page H73 for information.

❷ Up to 6 contact blocks (3 across / 2 high) can be attached.

❸ 90° offset knob operators for vertical mount enclosure are available. Add the "N" designation to selected operator part number. Example, D7P-SM22N.